

EZ CLASSIC CROSSDRAFT PAINT BOOTHS

RTT's EZ Classic Crossdraft spray booths are your solution for industrial, auto, and wood applications. Air is filtered at intake and exhaust, ensuring a clean workflow.

Easy to install and maintain, these booths are available in pressurized/non-pressurized, drive-through, and other configurations to fit your needs. Includes a 5-year warranty with RTT high-performance filters.

FEATURES

- **Construction:** RTT booths are engineered for durability and efficiency. Constructed from heavy-duty 18-gauge galvanized steel, each booth features a precision support structure and laser-cut panels for perfect alignment and quick assembly.
- **Doors:** Field-adjustable doors with two-axis hinges ensure a perfect fit, while our standard 36" personnel door combines strength, visibility, and easy operation.
- **Lighting:** Every booth includes industry-leading E-Light LED lighting... and meet UL safety standards for U.S. and Canadian use. Designed with 22-gauge powder-coated housings, these LEDs carry a 5-year warranty and meet UL safety standards for U.S. and Canadian use.
- **Filtration:** RTT's W-Series RP Paint Arrestor filters, secured with advanced FilterLoc technology, improve airflow, extend service life, and simplify filter changes.
- **Performance:** With quality tubeaxial fans, efficient motor systems, and compliant design, RTT booths deliver reliable performance meeting OSHA and NFPA standards—all built to last in demanding industrial environments.



Certified Controls



Secure Assembly




Easy Access



5-Year Warranty LED Lighting

OPTIONS

- **Air Management:** Choose from pressurized or non-pressurized systems and add air replacement units.
- **Layout & Access:** Available in solid back, drive-through, or reverse flow designs with roll-up, bi-fold, or tri-fold doors.
- **Expansion & Finish:** Add booth extensions (with or without lights) and select our durable, powder-coated white finish.
- **Accessories:** Complete your system with optional UL/ETL listed control panels and custom exhaust ductwork.

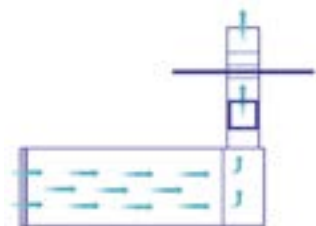

Classic Crossdraft booth air flow

SELECTING A BOOTH SIZE

At RTT, we believe you should never have to compromise between speed and quality. Our pre-engineered booths offer premium quality with the benefit of rapid shipment. For a solution built from the ground up, our custom engineering services ensure your exact specifications are met without exception.

Model Number	Interior			Exterior			Door Access	Door Opening				Lights	Air Flow	Fan		Filters
	W	H	L	W	H	L		W	H	Qty	Type			Qty	SCFM	
ECC-14-09-26-N-SB-S	14'-0"	9'-0"	26'-0"	14'-6.5"	10'-0"	26'-4"	1	9'-4"	8'-10.5"	1	Filtered	10	12600	30"	3HP	20
ECC-14-09-28-N-SB-S	14'-0"	9'-0"	28'-0"	14'-6.5"	10'-0"	28'-4"	1	9'-4"	8'-10.5"	1	Filtered	10	12600	30"	3HP	20
ECC-14-09-30-N-SB-S	14'-0"	9'-0"	30'-0"	14'-6.5"	10'-0"	30'-4"	1	9'-4"	8'-10.5"	1	Filtered	10	12600	30"	3HP	20

Alternative Configuration: Reverse Flow (RF) Drive Through (DT)

Alternative Options: Pressurized (P)

*Actual working depth is 18 inches less than interior length


Standard length sizing is illustrated above

*Booths ship in less than 10 days.

ONLY for these items without any modifications.

Any additional items on the order may impact lead time.


Contact your RTT representative for more information.

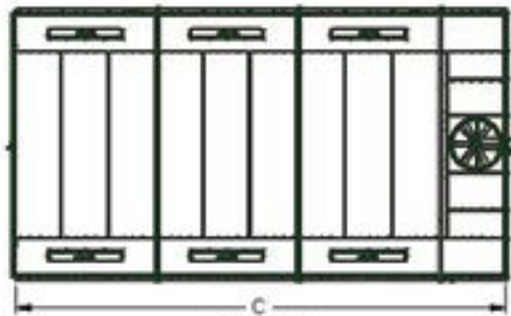

Plan View



Front View

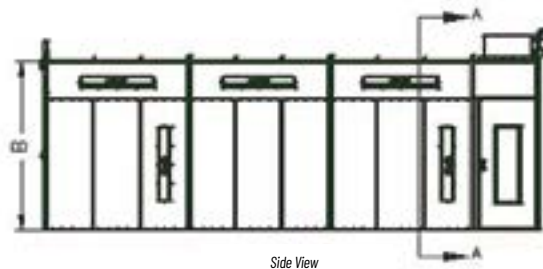

Side View



Section A-A